

## QUOTE REQUEST

## AUGER CONVEYORS

# ||| HENNIG®

Please complete this form and email to [info@hennig-inc.com](mailto:info@hennig-inc.com) or fax to your desired location.  
Find your nearest Hennig location.

[www.hennigworldwide.com](http://www.hennigworldwide.com)

### COMPANY (complete address)

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Name \_\_\_\_\_  
Title \_\_\_\_\_  
E-mail \_\_\_\_\_  
Phone \_\_\_\_\_ Fax \_\_\_\_\_ Date \_\_\_\_/\_\_\_\_/\_\_\_\_

### MACHINE INFORMATION


Make \_\_\_\_\_ Model \_\_\_\_\_  
Type  Lathe  Milling  Drilling  Tapping  Other \_\_\_\_\_

Available References  Photos  Drawings  
Chip Volume \_\_\_\_\_ in<sup>3</sup>/min

### AUGER DETAILS

End-to-End Length 1 \_\_\_\_\_ mm  
Spiral Outside Diameter 2 \_\_\_\_\_ mm  
Pitch 3 \_\_\_\_\_ mm  
Spiral Metal Thickness 4 \_\_\_\_\_ mm  
Drive Shaft Diameter 5 \_\_\_\_\_ mm

Additional Information \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

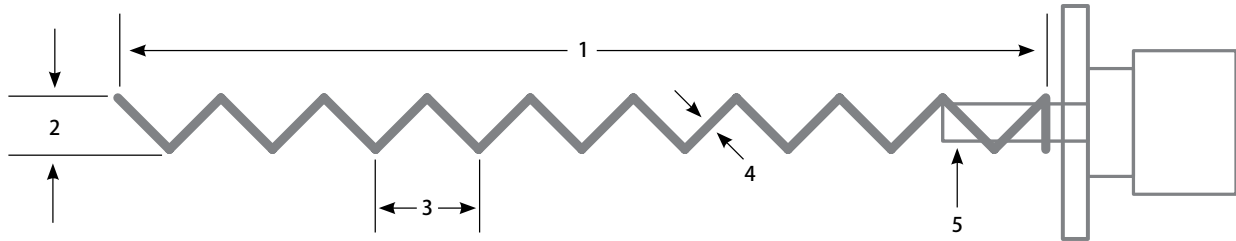

### MOUNTING TYPE



A (Internal hub bored to driveshaft, secured with bolt or set screw)



B (Slip connection that fits tightly onto driveshaft, connected with a pin)



C (Combination of A and B)



D (Spiral only, to be welded directly onto driveshaft)